



**2K TWO® PRIMER**



MASTON 2K EPOXY PRIMER with anti-corrosion pigments creates humidity and chemical resistant surface. It provides an adhesion bridge layer for putties, which can be applied directly on the primer without sanding. Suitable on all kind of metals (including galvanized metal, aluminium, copper, brass) as well as carbon fiber substrates and most plastics used in automotive OEM. Maston 2K Epoxy Primer can be applied outside spray booths, which is both convenient and efficient:

**PRODUCT HIGHLIGHTS:**

- Original 2K quality with revolutionary WISE 2K™ technology
- Revolutionary long potlife: Whole product can be used with no wasted paint
- Always ready-to-use: No activation required
- Superior adhesion and chemical resistance
- Extreme anti-corrosion

**BINDER:** Epoxy

**DEGREE OF GLOSS (DIN 67530 60 °):**  
matt 0-25 gloss units

**HEAT RESISTANCE:** 150°C

**STORAGE STABILITY:** 36 months

**SIZE:** 400ml

**SALES QTY:**  
400ml: 6 pcs


**USAGE INSTRUCTIONS:**

Uses: Designed to provide durable, anti-corrosive and extremely robust priming coat. List of suitable substrates: Bare Aluminum, Bare & Galvanized Steel, OEM Finish, Old Paint\*\*, Most Plastics Unsuitable substrates: Styrofoam  
\* ONE COVERING LAYER ON WHITE BASE COLOR  
\*\* ON DRY SURFACE (PREVIOUS PAINTWORK COMPLETELY HARDENED.) SOME ALKYD PAINTS MIGHT REACT WITH Maston 2K. TEST BEFORE APPLYING. PREVIOUS PAINTWORK MIGHT AFFECT FINAL SURFACE ATTRIBUTES.  
NB! Before painting: shake the can upside-down for 3 minutes.  
For better results make sure that sand-throughs and edges are levelled out correctly. When using the product indoors, ensure that the area within at least a 5-meter radius of the painted object is protected. Paint dust is lightweight and can spread over long distances through ventilation.

**RECOAT:**

always, 2-3 minutes in between layers

**MATERIAL**

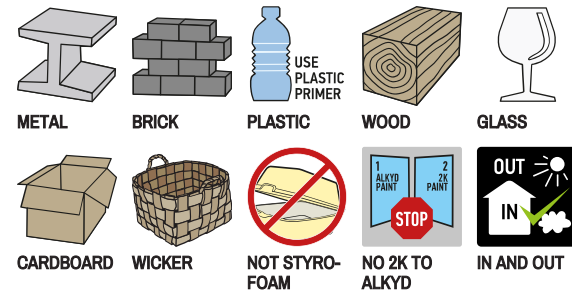

**HARDNESS**




SAFETY GEAR



3 MIN  
SHAKE UPSIDE DOWN



15-25  
SPRAY PATTERN



3 MIN  
LAYERS



5 SEC  
CLEAN UP



15 MIN  
TOUCH DRY



SANDABLE 12H  
SANDABLE






OVERPAINT AFTER 15 MIN  
OVERPAINT



2-COMPONENT EPOXY  
SOLVENT BASED

## MASTON 2K Two® Primer

Art. No.	MASTON 2K Two® Primer	Color	Barcode
20000519	Spraypaint Maston 2K Two Anti-Rust primer Red 400ml	●	6412490037765
20000518	Spraypaint Maston 2K Two Primer Grey 400ml	●	6412490037796
20000520	Spraypaint Maston 2K Two Primer Black 400ml	●	6412490037789
20000521	Spraypaint Maston 2K Two Primer White 400ml	○	6412490039172
20000519-EU	Spraypaint Maston 2K Two Anti-Rust primer Red 400ml	●	6412490038793

Art. No.	MASTON 2K Two® Primer	Color	Barcode
20000520-EU	Spraypaint Maston 2K Two Primer Black 400ml		6412490038816
20000518-EU	Spraypaint Maston 2K Two Primer Grey 400ml		6412490038823
20000521-EU	Spraypaint Maston 2K Two Primer White 400ml		6412490039189