



2K EPOXY SPRAYFILLER



MASTON 2K EPOXY FILLER is designed to optimize working hours. An epoxy compound ensures excellent anti-corrosion properties, high filling power, easy application, fast drying time and good sandability. Available in several shades of grey to be adapted to the Base Coat colour. For maximum adhesion and corrosion resistance, Car-Rep® 2K PU-Epoxy Fillers are recommended to be used together with Car-Rep® 2K Epoxy Primer. Car-Rep® 2K Epoxy Filler can be applied outside spray booths, which is time and cost-efficient.

PRODUCT HIGHLIGHTS:

- Original 2K quality with revolutionary WISE 2K™ technology
- Revolutionary long pot life: Whole product can be used with no wasted paint
- Always ready-to-use: No activation required
- Superior adhesion and filling power
- Extreme anti-corrosion

BINDER: Epoxy

DEGREE OF GLOSS (DIN 67530 60 °):

matt 0-25

HEAT RESISTANCE: 150°C

STORAGE STABILITY: 36 months

SIZE: 400ml

SALES QTY:

400ml: 6 pcs

USAGE INSTRUCTIONS:

INSTRUCTIONS:


Uses: Designed to provide durable, anti-corrosive priming coat. Superior filling power. Sanding instructions: After 12 hours. Start with 320, proceed with 400, then wet sand with 600 or 800, then finish with 1200/1500 List of suitable substrates: Bare Aluminum, Bare & Galvanized Steel, OEM Finish, Old Paint**, Most Plastics, Unsuitable substrates: Styrofoam

* ONE COVERING LAYER ON PLAIN WHITE BASE COLOR ** ON DRY SURFACE (PREVIOUS PAINTWORK COMPLETELY HARDENED.) SOME ALKYD PAINTS MIGHT REACT WITH CAR-REP® 2K.

TEST BEFORE APPLYING. PREVIOUS PAINTWORK MIGHT AFFECT FINAL SURFACE ATTRIBUTES.

When using the product indoors, ensure that the area within at least a 5-meter radius of the painted object is protected. Paint dust is lightweight and can spread over long distances through ventilation.

MATERIAL

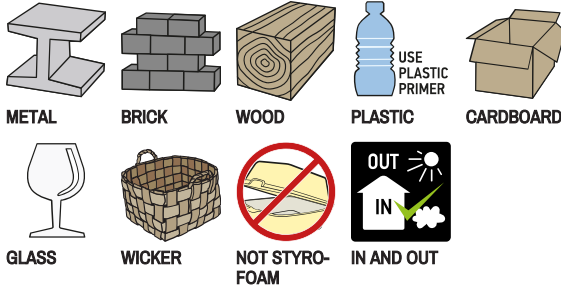

HARDNESS




SAFETY GEAR



3 MIN
SHAKE UPSIDE DOWN



15-25 CM
SPRAY PATTERN



3 MIN
LAYERS



CLEAN 5 SEC
CLEAN UP



15 MIN
TOUCH DRY



SANDABLE 12 H
SANDABLE



OVERPAINT AFTER 15 MIN
OVERPAINT



CHEMICAL RESISTANCE
8-10 DAYS

MASTON 2K Epoxy sprayfiller

Art. No.	MASTON 2K Epoxy sprayfiller	Color	Barcode
20000100	Spray Maston 2K Two Sprayfiller 400ml		6412490037772
20000100-EU	Spray Maston 2K Two Sprayfiller 400ml		6412490038809