





## POLYSTYRENE PRIMER

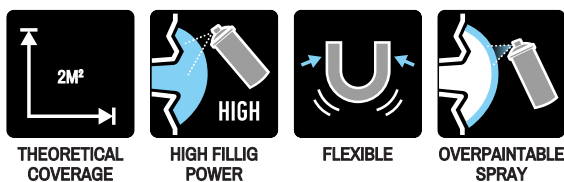

MASTON POLYSTYRENE PRIMER provides perfect protection for all polystyrene base materials. It forms a protective coating on the surface and eliminates penetration of solvents. It also smoothens the rough surface by filling the uneven structure of polystyrene. Let the surface dry around 2 hours and overpaint with any acrylic or water-based paint. ATTENTION! Alkyd based paints might cause reaction of the surface.

**MATERIAL**



**BINDER:** Waterbased

**DEGREE OF GLOSS (DIN 67530 60 °):**  
matt 0-25

**HEAT RESISTANCE:** 80°C

**STORAGE STABILITY:** 60 months

**SIZE:** 400ml

**SALES QTY:**  
400ml: 6 pcs

**USAGE INSTRUCTIONS:**

When using the product indoors, ensure that the area within at least a 5-meter radius of the painted object is protected. Paint dust is lightweight and can spread over long distances through ventilation.

**RECOAT:**

always, 5 minutes in between layers or topcoat after 2h




CLEAN



3 MIN  
SHAKE



15 CM  
SPRAY DISTANCE



SPRAY PATTERN



CLEAN UP



5 MIN  
TIME BETWEEN LAYERS



2 H  
TOUCH DRY




OVERPAINT AFTER 2H  
OVERPAINT



WATER BASED ALKYD  
WATER BASED

## MASTON Polystyrene Primer

Art. No.	MASTON Polystyrene Primer	Color	Barcode
400523-EU	Spray Polystyrene Primer 400ml		6412490035617
400523	Spray Polystyrene Primer 400ml		6412490039196