

www.maston.fi






2K PU LACQUER 720ML

MASTON • WWW.MASTON.FI • MASTON@MASTON.FI





www.maston.fi

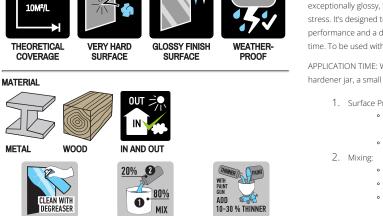

20% TO 80% MIX

11

TOUCH DRY

PU

CLEAN WITH DEGREAS-ER







SOLVENT BASED FINAL HARDNESS

ADD THINNER 10-30%





Maston 2K PU High Gloss Lacquer is a 2-component polyurethane lacquer hardened with aliphatic isocyanate resin. Specifically formulated for varnishing vehicles and other transport equipment, this lacquer forms an exceptionally glossy, high-quality surface that offers excellent resistance to solar UV radiation and mechanical stress. It's designed to be applied directly over basecoats or straight onto substrates, delivering optimal performance and a durable finish that ensures your surfaces maintain their exceptional appearance over time. To be used with Maston 2K PU Paint and Lacquer hardener.

APPLICATION TIME: Within 3 hours after the hardener has been added to the lacquer (2). Carefully open the hardener jar, a small amount of pressure may build up in the jar during storage.

- 1. Surface Preparation:
 - Ensure the surface to be painted is sanded or roughened and clean. Use a degreaser for thorough cleaning.
 - The temperature of both the surface and the surrounding air should be above 10°C.
 - Thoroughly mix the paint and hardener before adding the mixing.
 - Once the hardener is added, mix until you achieve a homogeneous mixture.
 - If needed, thin the paint using only Maston PU thinner (do not use general thinners or Tinners). Mix again until the mixture is homogeneous.
- 3. Application:
 - For spray painting, use a nozzle size of 1.3-1.5 mm for a top-feed spray gun, or 1.4-1.6 mm for a bottom-feed spray gun.

4. Safety:

- Both the paint hardener and the ready-mixed product contain isocyanates. Ensure adequate ventilation during application.
- · Especially during spray painting, we recommend using a powered air-purifying respirator. For intermediate and short-term use, a respirator with an A2-P2 combination filter can be used. Always protect your face and eyes while using a respirator.

Coverage is approximately 10 m²/l.

BINDER: Polyurethane

DEGREE OF GLOSS (DIN 67530 60 °): gloss 80-100 gloss units

HEAT RESISTANCE: 150°C

STORAGE STABILITY: 36 months

SIZE: 720ml

SALES QTY: 720ml: 2 pcs

MASTON 2K PU Lacquer 720ml

Art. No.	MASTON 2K PU Lacquer 720ml	Color	Barcode
20080332	Lacquer Maston 2K PU Gloss 720ml	0	6412490016357



