




## 2K PU LACQUER 720ML

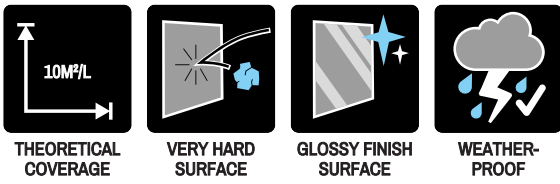

## High Gloss Maston 2K PU Lacquer

Maston 2K PU High Gloss Lacquer is a 2-component polyurethane lacquer hardened with aliphatic isocyanate resin. Specifically formulated for varnishing vehicles and other transport equipment, this lacquer forms an exceptionally glossy, high-quality surface that offers excellent resistance to solar UV radiation and mechanical stress. It's designed to be applied directly over basecoats or straight onto substrates, delivering optimal performance and a durable finish that ensures your surfaces maintain their exceptional appearance over time. To be used with Maston 2K PU Paint and Lacquer hardener.

**APPLICATION TIME:** Within 3 hours after the hardener has been added to the lacquer (2). Carefully open the hardener jar, a small amount of pressure may build up in the jar during storage.

**BINDER:** Polyurethane

**DEGREE OF GLOSS (DIN 67530 60 °):**  
gloss 80-100 gloss units

**HEAT RESISTANCE:** 150°C

**STORAGE STABILITY:** 36 months

**SIZE:** 720ml

**SALES QTY:**  
720ml: 2 pcs


### USAGE INSTRUCTIONS:

Usage:

1. Surface Preparation:
  - Ensure the surface to be painted is sanded or roughened and clean. Use a degreaser for thorough cleaning.
  - The temperature of both the surface and the surrounding air should be above 10°C.
2. Mixing:
  - Thoroughly mix the paint and hardener before adding the mixing.
  - Once the hardener is added, mix until you achieve a homogeneous mixture.
  - If needed, thin the paint using only Maston PU thinner (do not use general thinners or Tinnens). Mix again until the mixture is homogeneous.
3. Application:
  - For spray painting, use a nozzle size of 1.3-1.5 mm for a top-feed spray gun, or 1.4-1.6 mm for a bottom-feed spray gun.
4. Safety:
  - Both the paint hardener and the ready-mixed product contain isocyanates. Ensure adequate ventilation during application.
  - Especially during spray painting, we recommend using a powered air-purifying respirator. For intermediate and short-term use, a respirator with an A2-P2 combination filter can be used. Always protect your face and eyes while using a respirator.

Coverage is approximately 10 m<sup>2</sup>/l.

### MATERIAL



METAL



WOOD



IN AND OUT




CLEAN WITH DEGREASER



20% TO 80% MIX



ADD THINNER 10-30%



12H  
OVERPAINT



1H  
TOUCH DRY



8H  
FINAL DRYING



8 DAYS  
FINAL HARDNESS



PU  
SOLVENT BASED

## MASTON 2K PU Lacquer 720ml

Art. No.	MASTON 2K PU Lacquer 720ml	Color	Barcode
20080332	Lacquer Maston 2K PU Gloss 720ml	○	6412490016357