




HOLLOW SECTION COATING 1L (SCREW-TOP JAR)

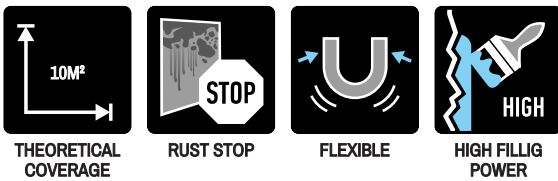



THEORETICAL COVERAGE

RUST STOP

FLEXIBLE

HIGH FILLIG POWER

HARDNESS



Maston Hollow Section coating effectively protects vehicle bodywork cavities particularly susceptible to rust such as doors, side panels, boot lids, bonnets etc. Rust can be prevented if applied regularly with a thin coat being enough to protect metal. The sealer has excellent water repellent and penetration properties. Shake the container for approx. 3 minutes before use. Use bar 2,5-4. Once applied, a light sticky film appears with self-regenerating properties that can also be used to protect the engine compartment. In addition the typical smell associated with conventional waxes, once the coat has been heated by the sun or the engine, is not present. Coverage 10m2. Drying time at + 20°C: Dry to touch after 2 hours, completely dry after 2,5 hours. Stain removal we recommend Maston Thinner.

STORAGE STABILITY: 60 months

SIZE: 1l

SALES QTY:
1l: 12 pcs

MASTON Hollow section coating 1L (screw-top jar)

Art. No.	MASTON Hollow section coating 1L (screw-top jar)	Color	Barcode
4150310	Hollow section coating 1L (screw-top jar)		6412490000165